


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04B 7/185</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 96/02094</b> <b>(43) International Publication Date:</b> 25 January 1996 (25.01.96)
<b>(21) International Application Number:</b> PCT/US95/08619 <b>(22) International Filing Date:</b> 7 July 1995 (07.07.95) <b>(30) Priority Data:</b> 272,060 8 July 1994 (08.07.94) US <b>(71) Applicant:</b> QUALCOMM INCORPORATED [US/US]; 6455 Lusk Boulevard, San Diego, CA 92121 (US). <b>(72) Inventor:</b> GILHOUSEN, Klein, S.; 6474 Jackson Creek Road, Bozeman, MT 59715 (US). <b>(74) Agents:</b> MILLER, Russell, B. et al.; Qualcomm Incorporated, 6455 Lusk Boulevard, San Diego, CA 92121 (US).		<b>(81) Designated States:</b> AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).  <b>Published</b> <i>With international search report.</i>

**(54) Title:** AIRBORNE RADIOTELEPHONE COMMUNICATIONS SYSTEM**(57) Abstract**

The airborne communication system enables one or more radiotelephones to communicate with a ground based cellular radiotelephone system. In the preferred embodiment, the aircraft is equipped with a repeater that relays a signal from the airborne radiotelephone to the ground base station and vice versa. Alternate embodiments use as airborne base station to register the radiotelephones before registering them with the ground system. Alternately, the antennase on the ground could be used to form aerial cell sites by pointing the antennas upward to where the aircraft flies through the cells. The system of the present invention provides the additional benefit of enabling the ground based cellular radio systems to source a call to the aircraft radiotelephone.

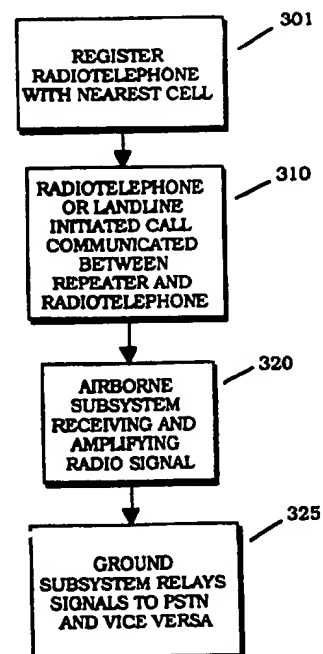

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## AIRBORNE RADIOTELEPHONE COMMUNICATIONS SYSTEM

## BACKGROUND OF THE INVENTION

## 5 I. FIELD OF THE INVENTION

The present invention relates to the field of communications. More particularly, the present invention relates to cellular radiotelephone communications between an airplane and a ground based station.

10

## II. DESCRIPTION OF THE RELATED ART

Present communications technology enables aircraft passengers to make telephone calls to anywhere in the world from any properly  
15 equipped airplane. Large airline-type aircraft as well as smaller general aviation-type aircraft can be equipped with the radiotelephone equipment.

A radiotelephone conversation is typically accomplished by first entering the telephone number to be called as well as credit card information to pay for the call. The radiotelephone then connects with one  
20 of 70 - 80 radiotelephone base stations, also known as cells, on the ground. The cell to which it connects depends on to which base station the aircraft is closest when the call is initiated. The cells, each connected to the public switched telephone network (PSTN), cover most of the continental United States, thus allowing a telephone call to be initiated from an aircraft  
25 almost anywhere.

Aircraft radiotelephones, however, experience a number of problems. First, the aircraft based radiotelephone does not register in the ground based system. The ground based system, therefore, does not know the location of the aircraft radiotelephone. This restricts the aircraft  
30 radiotelephone to initiating calls; it cannot receive calls since the ground system does not know where to forward calls.

Another problem is that the aircraft radiotelephone system does not perform hand-offs between cells as is done in ground based cellular radiotelephone systems when the radiotelephone reaches the edge of the  
35 cell. This results in the call from the aircraft radiotelephone being dropped when the aircraft reaches the limit of the cell's coverage. There is a resulting need for an airborne radiotelephone system that is compatible with the ground based cellular radiotelephone system. In other words, an airborne radiotelephone system is needed that enables ground initiated

telephone calls to be received by the airborne radiotelephone in addition to the call from the airborne radiotelephone being handed off to the next cell as it reaches the edge of the cell's coverage.

5

## SUMMARY OF THE INVENTION

The radio communications system of the present invention encompasses a ground based subsystem and an airborne based subsystem. The ground based subsystem is comprised of a base station for  
10 transmitting land originated signals and receiving repeated signals from the airborne subsystem. The base station is coupled to a public switched telephone network (PSTN). The airborne based subsystem is comprised of an airborne wireless radio for transmitting and receiving signals and an airborne wireless repeater for repeating the signals to the base station.

15

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows the airborne radiotelephone communications system of the present invention.

20

FIG. 2 shows the airborne based subsystem of the present invention.

FIG. 3 shows a flowchart of the process of the present invention.

FIG. 4 shows a block diagram of an alternate embodiment of the present invention.

25

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The airborne radiotelephone communication system of the present invention is illustrated in FIG. 1. This system is comprised of two  
30 subsystems: the ground based subsystem (105) and the airborne based subsystem (125).

The ground based subsystem (105), in the preferred embodiment, is the code division multiple access (CDMA) cellular radiotelephone system. An alternate embodiment uses the time division multiple access system.  
35 Another alternate embodiment uses the present advanced mobile phone system (AMPS). A typical CDMA radiotelephone system is discussed in greater detail in U.S. Patent No. 4,901,307 to Gilhousen et al. and assigned to Qualcomm, Inc.

The ground based radiotelephone system is comprised of a base  
40 station (120), also known as a cell site, coupled to a mobile switching

center (115) that is coupled to the public switched telephone network (PSTN) (110). The base station (120) communicates with the mobile radiotelephones and switches the signals from the radiotelephones to the mobile switching center (115). The base station (120) also provides the proper channels to the radiotelephone, thus enabling communication with the base station. The mobile switching center (115) switches the signals from the base station (120) to the PSTN (110) and vice versa.

Each base station (120) is coupled to an antenna (150) that receives and radiates the CDMA radiotelephone signals. In the preferred embodiment, the antenna (150) is identical to typical cell site antennas that are well known to one skilled in the art. An alternate embodiment uses an antenna that radiates upward. This upward radiation forms a cell that is elevated above the ground allowing the airborne radiotelephone to travel through the elevated cells in the same manner that a mobile radiotelephone on the ground travels through terrestrial cells. An antenna that forms this type of elevated cell is a typical directional antenna that is well known in the art.

A block diagram of the airborne based subsystem of the present invention is illustrated in FIG. 2. This subsystem uses a CDMA-type radiotelephone (205) to communicate with a radiotelephone signal repeater (210), having an antenna, that is located in the aircraft. In the preferred embodiment, the repeater (210) also has an amplifier to increase the signal's gain that is being communicated to the repeater.

The repeater (210) receives the signals from the individual radiotelephones (205) within the aircraft and relays them to an antenna (215) mounted on the outside of the aircraft. The outside antenna (215) relays the signals to the base station on the ground. This subsystem may have a single radiotelephone, as in a small aircraft, or multiple radiotelephones, as in an airline size aircraft.

The airborne subsystem also operates in the reverse direction. Telephone calls from the PSTN to the base station on the ground are transmitted to the outside antenna (215) that relays them to the repeater (210) mounted in the aircraft. The repeater's antenna communicates the signal to the proper radiotelephone (205) in the aircraft. The radiotelephones (205) determine which signal is to be decoded by the process described in *Gilhousen et al.* and in the Telecommunications Industries Association/Electronic Industries Association Interim Standard 95 (TIA/EIA/IS-95).

In an alternate embodiment, the radiotelephone signal repeater is replaced by an airborne base station that has the ability to register the radiotelephones on the aircraft. The airborne base station then registers the radiotelephone with the ground based subsystem. This base station  
5 has the same functionality of its ground-based counterpart but on a much smaller scale since it does not have to handle the thousands of radiotelephones of the ground-based station.

The airborne communications system of the present invention operates in a similar way to the ground based CDMA radiotelephone  
10 system discussed in *Gilhousen et al.* A flowchart of this operation is illustrated in FIG. 3.

The process begins by the airborne repeater registering the radiotelephone with the nearest cell site (301). This is accomplished in the same manner as a terrestrial radiotelephone registers with the ground  
15 based radiotelephone system; the repeater searches for the strongest pilot signal and registers with that cell. This registration process involves the radiotelephone's telephone number and electronic serial number being transmitted to the base station. The registration process is described in greater detail in U.S. Patent No. 5,289,527 to Tiedemann and assigned to  
20 Qualcomm, Inc.

The radiotelephone or ground-based landline telephone system can now initiate a call (310). The call from the radiotelephone is received by the airborne repeater and amplified (320) before being transmitted to the ground base station. The ground base station then transmits the call to the  
25 mobile switching center that routes the call to the PSTN where it is then connected to the called telephone number (325).

The signals from the PSTN to the airborne radiotelephone are routed in the reverse of the radiotelephone initiated call. The mobile switching center switches the call to the base station to which the  
30 radiotelephone is registered. The base station then transmits the signal (325) to the airborne external antenna that relays it to the aircraft repeater (320). The repeater amplifies it and transmits the amplifier signal to the radiotelephone in the aircraft.

The present invention also enables a ground telephone or  
35 radiotelephone to contact an airborne radiotelephone. Since the repeater has registered the airborne radiotelephone with the proper ground base station, the mobile switching center knows to which base station the call is to be routed. Once the call is routed to the proper base station it is transmitted to the airborne repeater which then amplifies the call and

transmits it to the radiotelephones on the aircraft. As discussed above, the radiotelephones then determine which signal is to be decoded.

Another benefit of the present invention is the hand-off capability. Once the aircraft reaches the fringe of the present cell site, the radiotelephone begins the hand-off process described in *Tiedemann*. The signals from the ground base stations are received by the external antenna of the airborne subsystem and repeated to the radiotelephones. This enables the radiotelephones to search for the strongest pilot signal of the next cell and register with that base station. The determining factor on when the quality of the pilot signal has been reduced to the point that a hand-off is required is when the pilot signal drops a predetermined amount. This amount may be different for every system and is set to optimize the system performance.

In the alternate embodiment, the airborne repeater is replaced by a base station-type unit that registers the radiotelephone aboard the aircraft. A block diagram of the airborne base station is illustrated in FIG. 4. Once the radiotelephone is registered with the aircraft base station, the aircraft base station then searches for the strongest pilot signal from a ground base station and registers with that base station.

Referring to FIG. 4, the airborne base station is comprised of a number of base station transceivers (410) that are the link between the radiotelephone and the base station. The CDMA interconnect subsystem (415) routes the signals between the transceivers (410) and the rest of the base station. The call control processor (420) controls signaling with the radiotelephones, controls all call processing, and allocates the base station resources. The time and frequency unit (430) provides the timing and frequency signals for the base station. The base station manager (435) performs initialization, configuration, and performance management of the base station. And finally, the selector bank subsystems (440) processes and formats the data between the ground base stations and the radiotelephone. The selector bank subsystems (440) are connected to the aircraft's external antenna (315) to receive and radiate the radiotelephone signals.

Other embodiments using the airborne base station may have different components and different features. A base station that simply registers the radiotelephone and relays this registration to the ground base station is also within the scope of the present invention.

## CLAIMS

1. A radio communications system having a code division  
multiple access (CDMA) ground based subsystem and an airborne based  
subsystem, the radio communications system comprising:  
the CDMA ground based subsystem comprising:  
a base station for transmitting land originated signals and  
receiving repeated signals from the airborne subsystem, the base  
station being coupled to a public switched telephone network  
(PSTN); and  
the airborne based subsystem comprising:  
an airborne wireless radio for transmitting and receiving  
signals; and  
an airborne wireless repeater for repeating the signals to the  
base station.
2. The radiotelephone communications system of claim 1  
wherein the airborne radio transmits and receives code division multiple  
access (CDMA) signals and the base station is part of a CDMA  
radiotelephone system.
3. The radiotelephone communications system of claim 1  
wherein the base station is coupled to the PSTN through a mobile  
switching center.
4. A code division multiple access radiotelephone  
communications system having a ground based subsystem and an  
airborne based subsystem, the radio communications system comprising:  
the ground based subsystem comprising:  
a base station for transmitting land originated signals to the  
airborne subsystem and receiving signals from the airborne  
subsystem, the base station being coupled to a public switched  
telephone network (PSTN); and  
the airborne based subsystem comprising:  
an airborne radiotelephone for transmitting and receiving  
signals; and  
an airborne base station for registering the radiotelephone  
with the ground based subsystem and relaying the land originated signals



7.

14 from the ground based subsystem to the radiotelephone and  
radiotelephone originated signals to the ground based subsystem.

5. A method for communicating in a radiotelephone system  
2 comprising a ground based subsystem and an airborne based subsystem,  
the ground based subsystem having a plurality of base stations, each base  
4 station transmitting a pilot signal, the airborne based subsystem having a  
radiotelephone that sources and receives signals between an airborne base  
6 station, the method comprising:

the radiotelephone registering with the airborne base station;

8 the airborne base station detecting the pilot signals from the  
plurality of ground base stations;

10 the airborne base station registering the radiotelephone with a first  
ground base station of the plurality of base stations in response to a quality  
12 indication of the first ground base station's pilot signal;


the airborne base station relaying signals between the  
14 radiotelephone and the first ground base station;

if the quality indication of the pilot signal is less than a  
16 predetermined threshold, the airborne base station detecting the pilot  
signals from the plurality of ground base stations; and

18 if the quality indication of the pilot signal is less than a  
predetermined threshold, the airborne base station registering the  
20 radiotelephone with a second ground base station of the plurality of base  
stations in response to the quality indication of the second ground base  
22 station's pilot signal.

1/3

FIG. 1

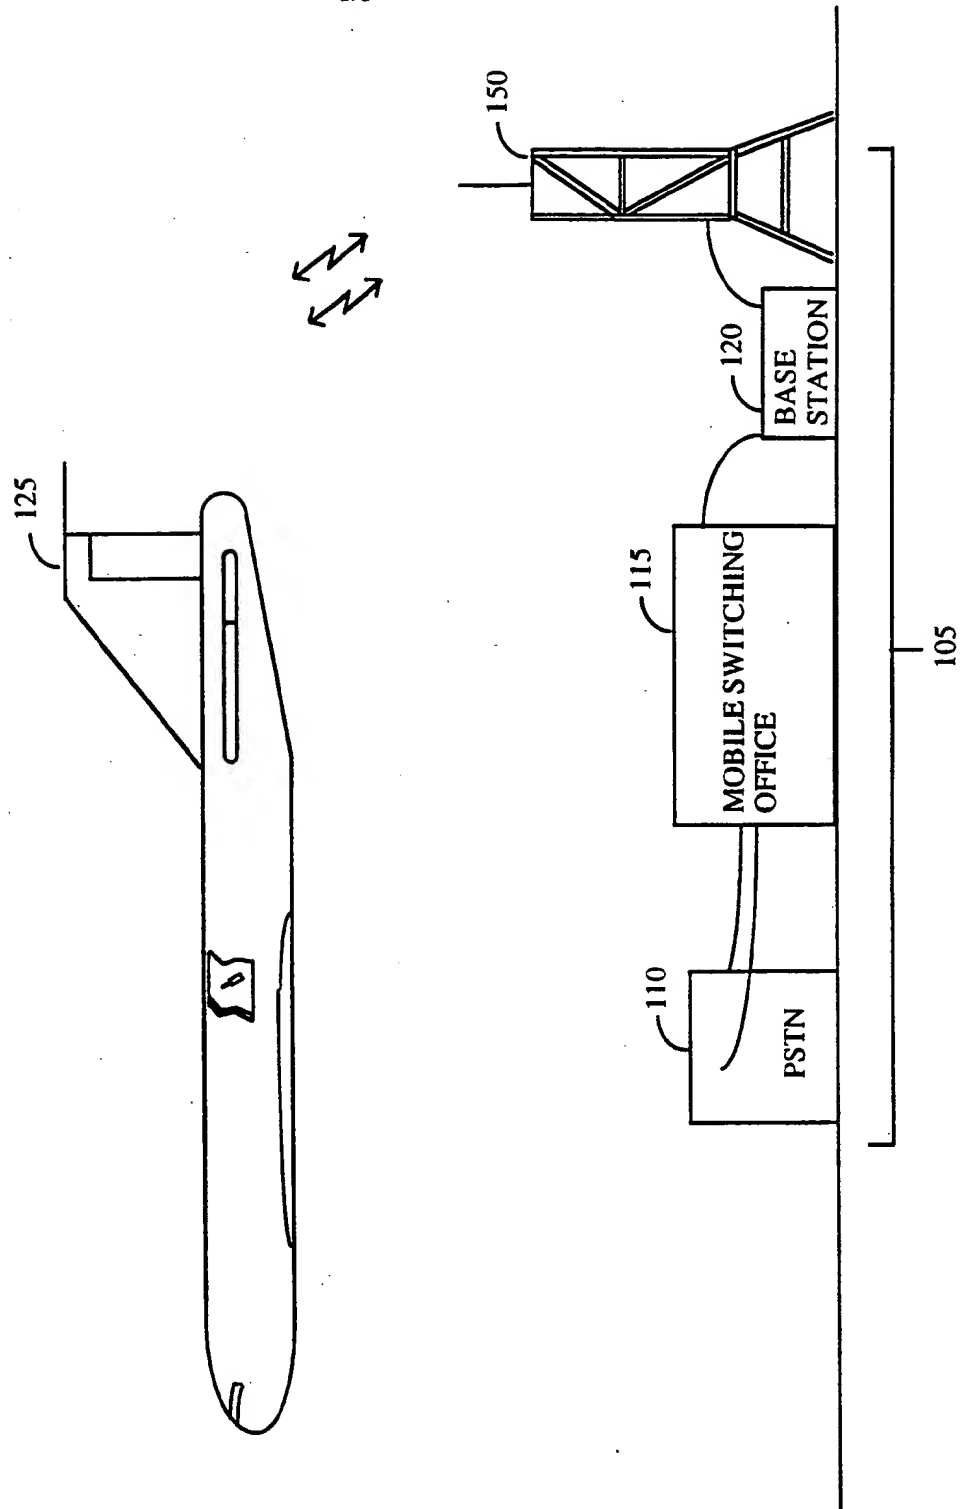

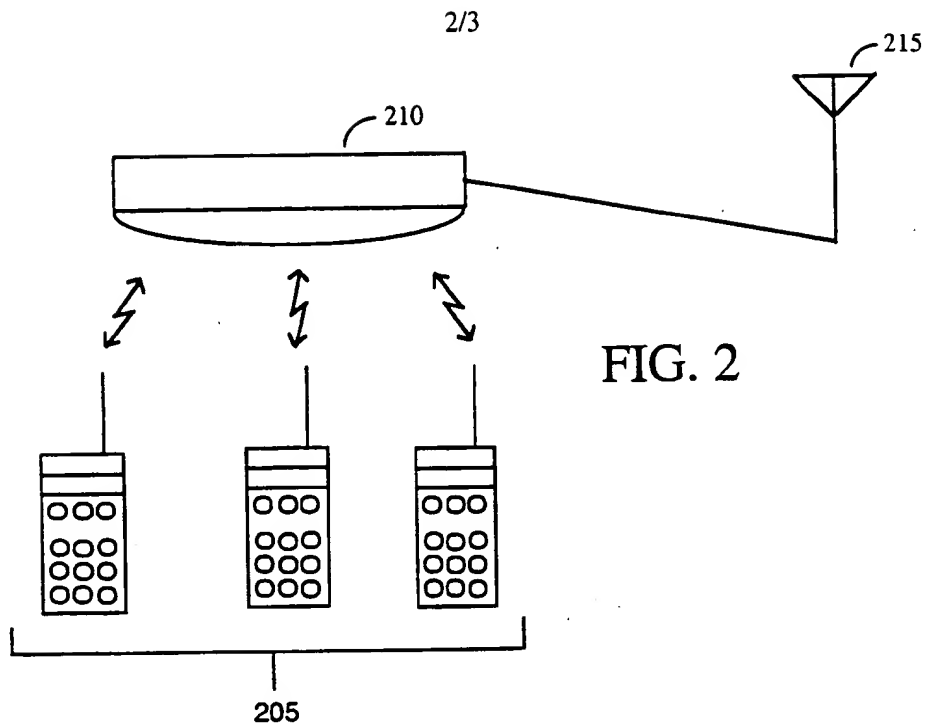


FIG. 2

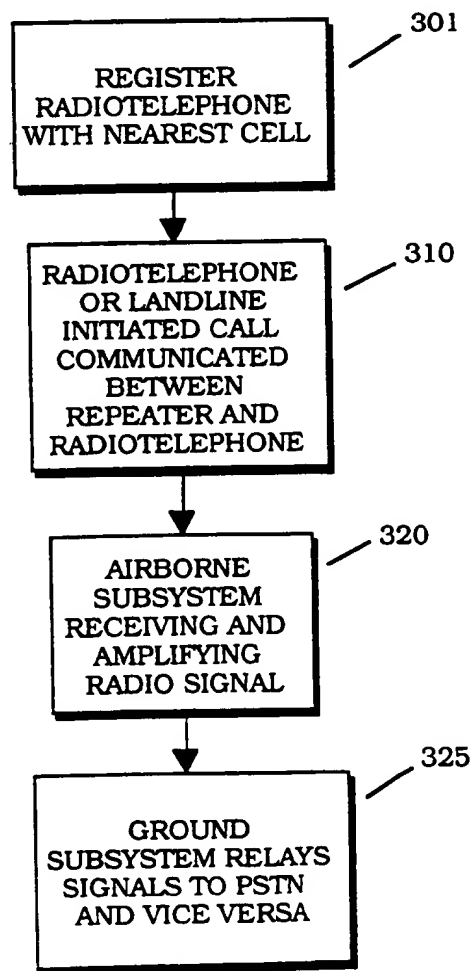


FIG. 3

3/3

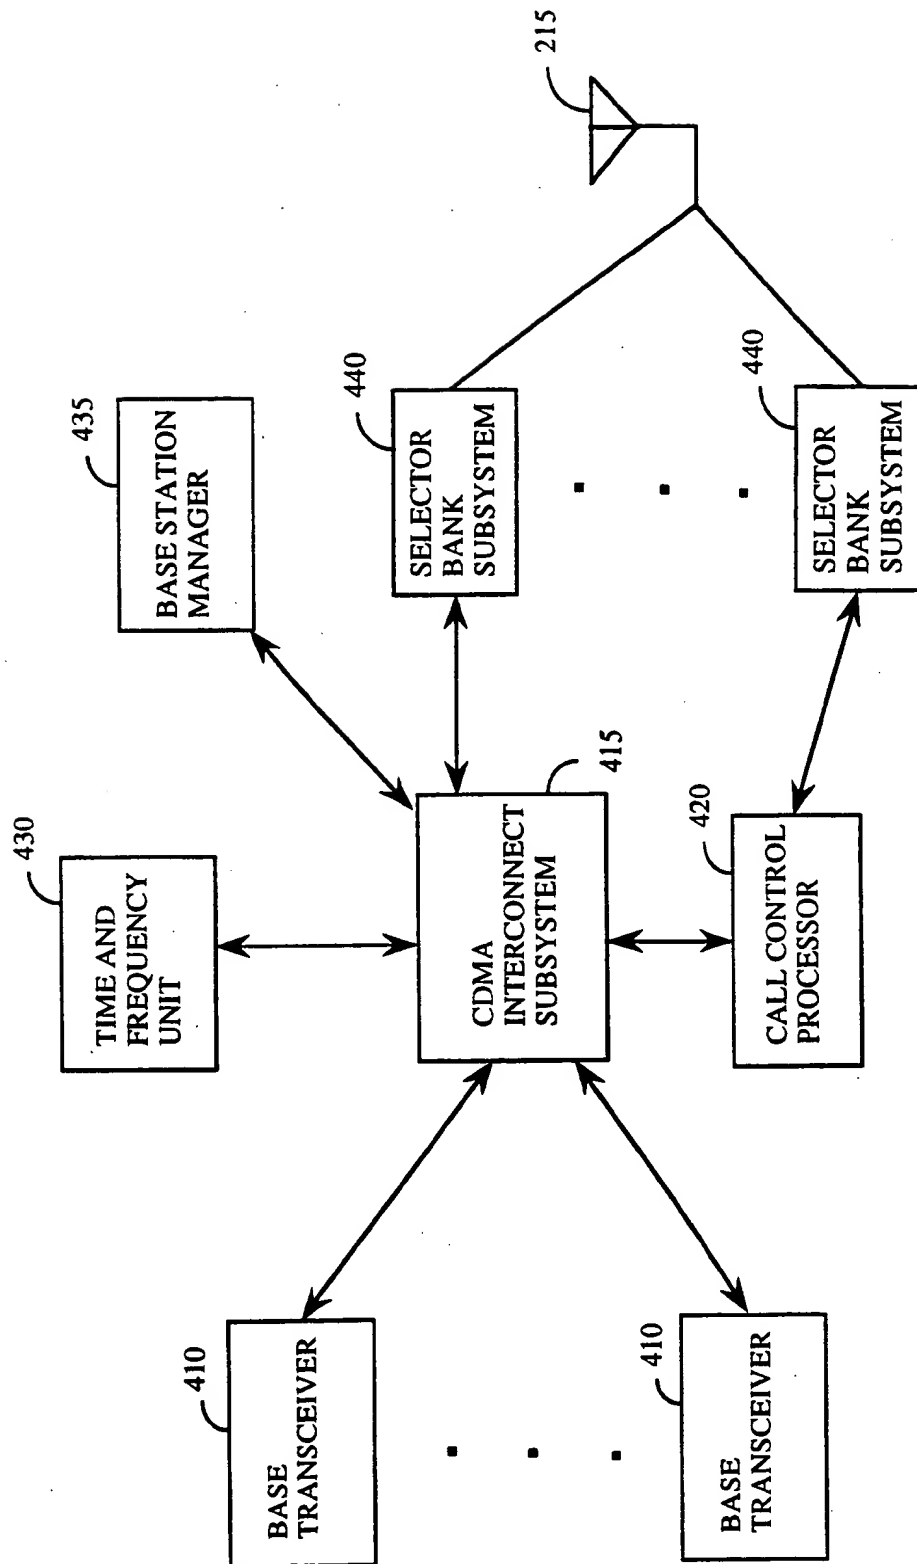


FIG. 4

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 95/08619

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 H04B7/185

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS, COMMUNICATIONS-SOUND TO LIGHT, vol.1, June 1987, SEATTLE, WASHINGTON, US pages 513 - 519 R. ROGARD ET AL. 'PRODAT Aeronautical Communication System: Overall Architecture and Preliminary Test Results' see page 516, right column, line 29 - page 517, right column, line 23 ---	1-5
Y	US, A, 5 123 112 (CHOATE) 16 June 1992 see column 3, line 27 - column 4, line 48; figure 1 --- -/--	1-5

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

**\* Special categories of cited documents :**

- \* 'A' document defining the general state of the art which is not considered to be of particular relevance
- \* 'E' earlier document but published on or after the international filing date
- \* 'L' document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \* 'O' document referring to an oral disclosure, use, exhibition or other means
- \* 'P' document published prior to the international filing date but later than the priority date claimed

- \* 'T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \* 'X' document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \* 'Y' document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* '&' document member of the same patent family

Date of the actual completion of the international search

11 September 1995

Date of mailing of the international search report

23.10.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Bischof, J-L

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 95/08619

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>FIFTH NORDIC SEMINAR ON DIGITAL MOBILE  RADIO COMMUNICATIONS, December 1992,  HELSINKI, FINLAND  pages 123 - 130, XP457846  G.D'ARIA ET AL. 'Terrestrial Flight  Telephone System: Integration Issues for a  Pan-European Network'  see page 125, left column, line 4 - page  126, left column, line 10  -----</p>	1-5
A	<p>WO,A,94 05129 (ERICSSON) 3 March 1994  see abstract  -----</p>	4

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 95/08619

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-5123112	16-06-92	US-A- 5212804	18-05-93
WO-A-9405129	03-03-94	SE-C- 500197	02-05-94
		AU-B- 4594693	15-03-94
		BR-A- 9305610	04-04-95
		CN-A- 1083990	16-03-94
		EP-A- 0609412	10-08-94
		FI-A- 941774	15-04-94
		JP-T- 7500471	12-01-95
		SE-A- 9202373	19-02-94

Form PCT/ISA/210 (patent family annex) (July 1992)

***This Page Blank (uspto)***